


PRODUCT PARAMETER MANUAL



Lamina

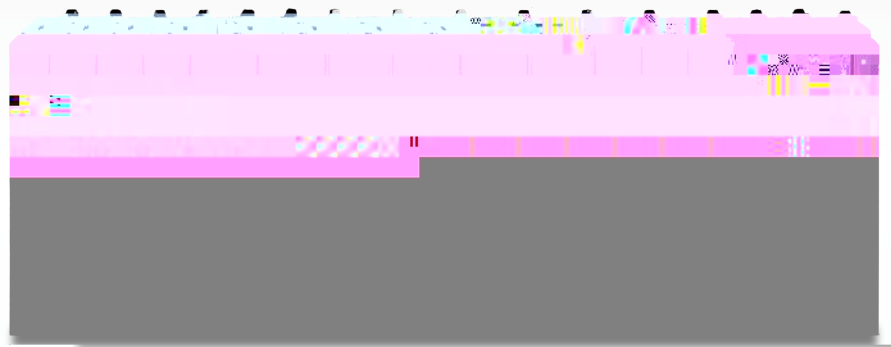

I/O



公司简



2015

公司地址



EtherCAT[®]

CE



LUC-EAB

24VDC(-15% ~ +20%)
150mA


32

DC24V
2A(Max)

IP20


CC-Link IE Field Basic

C		LUC-CEB
	2XRJ45 2X20P	
	24V DC(-15%~+20%) 150mA	
	C 100M(Max)	
I	32 MAX. 512 BYTE () MAX. 512 BYTE ()	
	DC24V 2A(Max)	
	IP20 D	

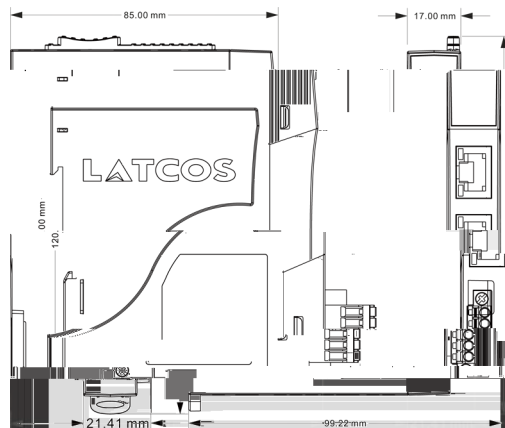



M		LUC-MTB
	2XRJ45 2X20P	
	24V DC(-15%~ +20%) 150mA	
	MODBUS TCP 100M(Max)	
I	32 MAX. 512 BYTE () MAX. 512 BYTE ()	
	DC24V 2A(Max)	
	IP20 D	


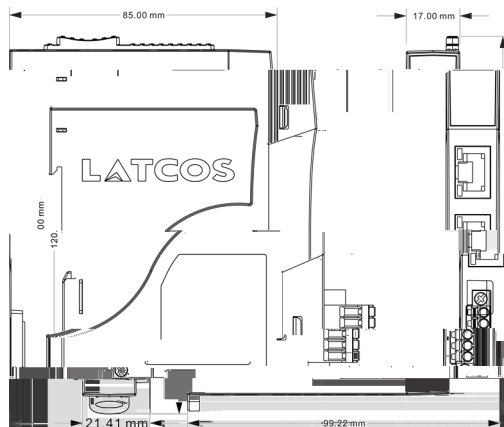



DI-16
DI-32

20mA


16
PNP or NPN

32

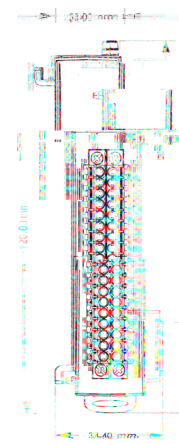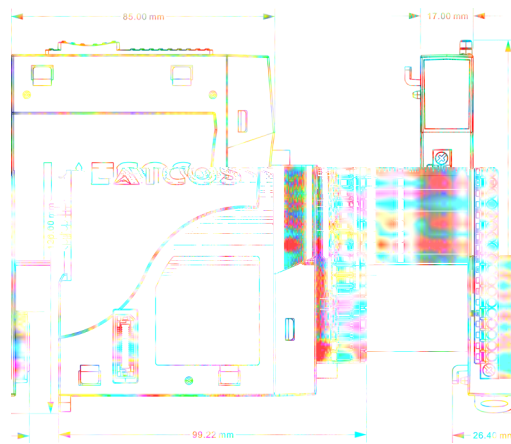

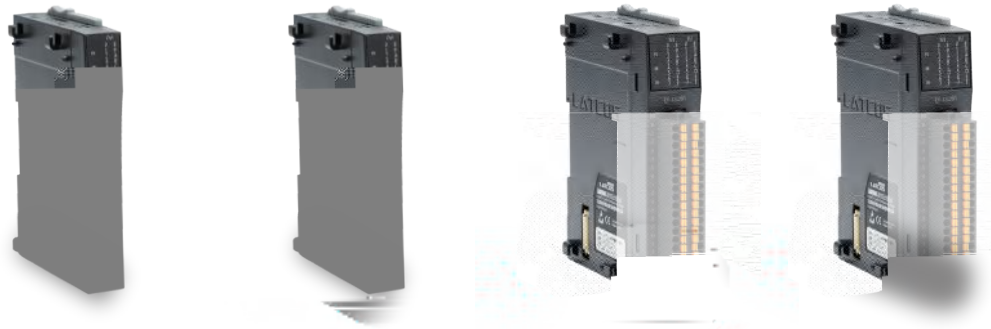

DO-16 PNP	ES-2161D			
DO-16 NPN		ES-2162D		
DO-32 PNP			ES-2321D	
DO-32 NPN				ES-2322D
20mA				
16		32		
PNP		NPN		
0.5 A				
24VDC, MAX. 4A				
500V DC				
2				
IP20				
DIN 35				
0 ~+55 (-25 ~+85)				

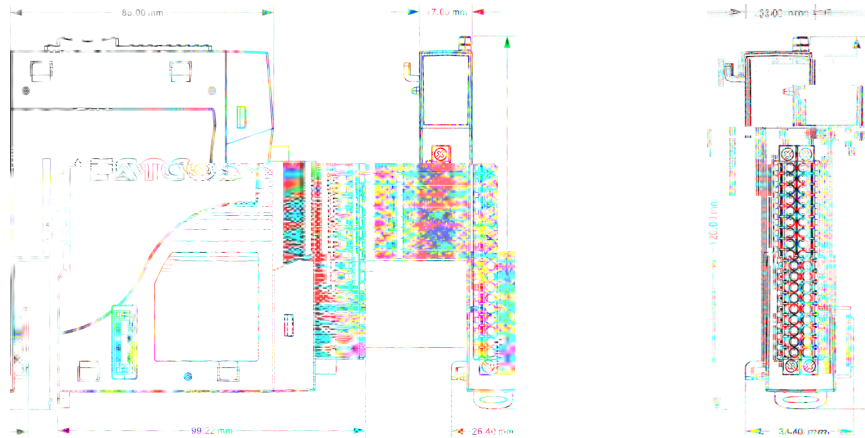

CE



DO-8

ES-2083D

20mA

8

5A 250VAC/30VDC

5A

250VAC/30VDC

1250VA/150W


1×10⁵ AgNi+ 0.5A 125VAC 40°C 1s 9s

500V

IP20

DIN35

0 ~+55 (-25 ~+85)

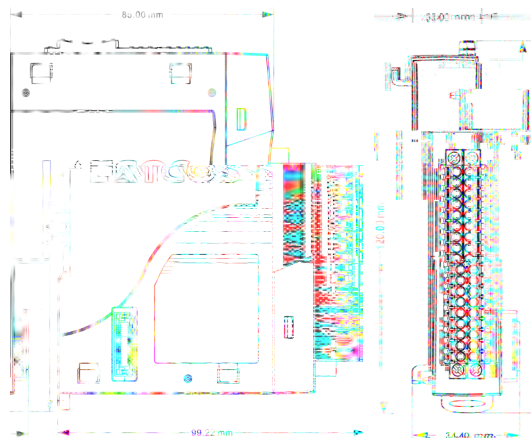



AI-8
 AI-8
 AI-4

20mA

8

16 ()
 0~20mA / 4~20mA
 124.5


8

16 ()
 0~10V
 10MK

CE





AO-8	ES-4081A		
AO-8		ES-4082A	
AO-4			ES-4043A
20mA			
8	8	4	
16 ()	16 ()	16 ()	
0~20mA/4~20mA	0~10V	0~20mA/4~20mA/0~10V	
500	1K	500	
±0.3%	±0.3%	±0.3%	
1kSPS/ch	1kSPS/ch	1kSPS/ch	
IP20			
DIN 35			
0 ~ +55 (-25 ~ +85)			

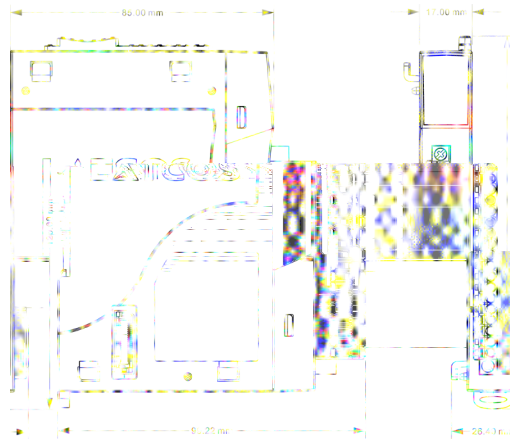

CE



RH8!, #	EG! ' \$, +5	
RH8!(EG! ' \$(+5
H7!,		EG! ' \$, , 5
20mA		
A87	1* fl t	1* fl t
	%GDG#	%GDG#
	@\$" i	@\$" i
	PH%\$ 7i) \$? ZGF 6ZB Z9
	-&SS r Z,) \$ fdH U* S r Z&) \$ fB] t	? 1&SSr 2% SS G Sr 2% SS F Sr 2% SS "6. %SSr 2% &S > 1&SSr 1% SS B 1&+Sr 2% SS "9 / 1&+Sr %SS \$"%
	IP20	
	D-B')	
	\$ r Z)) fl !&) r Z,) t	

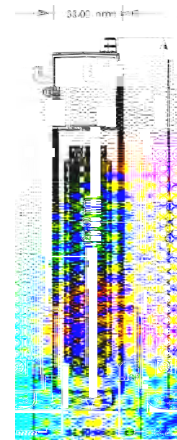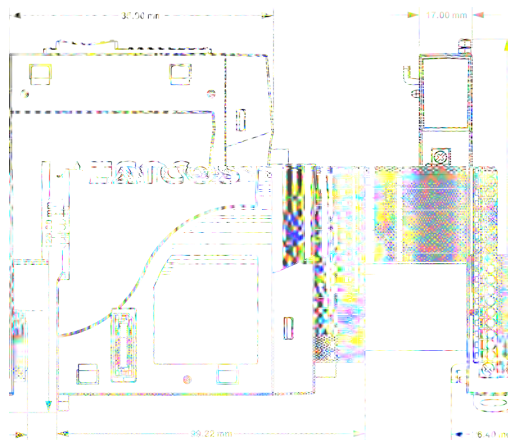


CE



4CH		ES-04PM
	20mA	
	1x4CH	
	NPN	
	24 V DC (-15 %/+20 %), (IEC61131-2, TYPE 2)	
	MAX. 0.5 A /CH,	
	200KHZ/	
	32	32
	1X4CH	
	NPN	
	24 V DC (-15 %/+20 %), (IEC61131-2, TYPE 2)	
	2X4CH	
	NPN	
	24 V DC (-15 %/+20 %), (IEC61131-2, TYPE 2)	
	MAX. 0.5 A /CH,	
	IP20	
	DIN 35	
	0 ~+55 (-25 ~+85)	



4		ES-04DMA
	20mA	
	1x4CH	
	NPN	
	24 V DC (-15 %/+20 %), (IEC61131-2, TYPE 2)	
	MAX. 0.5 A/CH, 200KHZ/	
	4X4CH	
	NPN PNP	
	24 V DC (-15 %/+20 %), (IEC61131-2, TYPE 2)	
	2X4CH	
	NPN	
	24 V DC (-15 %/+20 %), (IEC61131-2, TYPE 2)	
	MAX. 0.5 A/CH,	

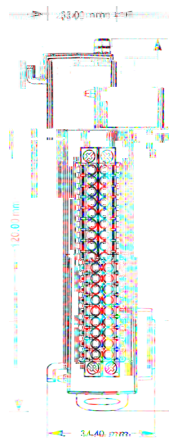


CE



2CH		ES-02HC
	20mA	
	2CH	
	,AB, ABZ	
	32bit	
	< 200KHz	
	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	
	24 V DC (-15 %/+20 %), (IEC61131-2, type 2)	NPN
	IP20	
	DIN35	
	0 ~+55 (-25 ~+85)	

CE

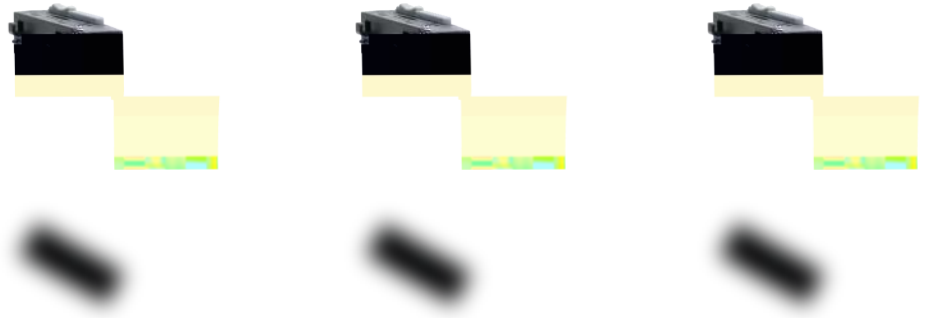

	EGl \$&A 6! (,.)	EGl \$&A 6! (&&	EGl \$&A 6! & ' &
	20mA		
	2		
	1&\$ \$AE% &\$ \$ VUI X/ . - * \$ \$ VUI Xž, ž ž		
	RG(,) fl Ł	RG(&&fl Ł	RG&' &fl Ł
	A cXVi g' '#		
	1&, VntŸ' '%, VntŸ		
	3&		
	0%< ž&< žš' < žš (< žš) < žš* < žš: < žš<		
	IP20		
	D-B')		
	s r Ž)) fl !&) r Ž.) Ł		

